Simon Framevent Hi-Flow & Hi-Flow+

Manufactured in the highest quality U.V Stabilised PVCu, the Simon Framevent HF & HF + have been specifically designed to make it easy to achieve the requirements of Approved Document F 2021 whilst still maintaining the smooth, rounded aesthetic synonymous of the Framevent range.

FEATURES

- A smooth, rounded design
- Snap on, quick fit ends
- Positive open & close action
- Integral flyscreen in external hood
- Suitable for PVCu, timber & aluminium windows

OPTIONS

- Rod control available- for full compliance with Approved Document K 2013
- Can be fitted to give updraught or down-draught
- Dual colours & RAL colours available on request
- Joiner pieces available
- 10mm & 13mm slot options

Tested in accordance with BS EN 1026:2016 & BS EN 1027: 2016 Weather performance

AVAILABLE IN:

Standard white (RAL 9910) Bright white (RAL 9016) Cream (RAL 1015)
Tan (RAL 8003) Mahogany Rosewood (RAL 8017) Black (RAL 9005)
Grey (RAL 7016) Irish Oak (RAL 1011) Chartwell Green (BS 14 C 35)
Silver Grey (RAL 7001) Slate Grey (RAL 7015) Agate Grey (RAL 7038)
Black Brown (RAL 8022) Ice Cream White (RAL 9001)

R.W. Simon Limited
System Works, Hatchmoor Industrial Estate, Torrington, Devon EX38 7HP United Kingdom
Tel: **01805 623721** Fax: **01805 624578** Email: **info@rwsimon.co.uk** Web: **www.rwsimon.co.uk**

Simon Framevent HF - HF+

Model Details	
Framevent HF	Length – 415mm 13mm Slot Size – 365x13mm - Equivalent area– 4191mm² 10mm Slot Size – 2 x (180x10mm) + (10mm land) - Equivalent area– 3636mm² Box qty – 50
Framevent HF+	Length – 525mm 13mm Slot Size – 2 x (230x13mm) + (10mm land) - Equivalent area– 5205mm² 10mm Slot Size – 2 x (230x10mm) + (10mm land) - Equivalent area– 4623mm² Box qty – 50

All EA ratings listed are as per BS 13141-1:2019

FIXING INSTRUCTIONS

- Rout out the frame with the correct slot size & configuration for the model to be fitted
- Place unit centrally over the slots
- Fix unit in place by using screws provided
- Screw hole centres are 20mm in from each end (40mm off the overall length)

PERFORMANCE

- Independently tested to BS EN 13141-1:2019
- Water tightness of 400pa
- Independently acoustically tested in accordance with BS EN 20140-10:2016, ISO 140-10:2010

MAINTENANCE

- The Framevent can be cleaned using a damp cloth. The external hood should be brushed lightly to remove dust from the flyscreen area.

**Airflow rates quoted are for when fitted in accordance with manufacturer's instructions.*
*We recommend silicone sealing vents for best results**



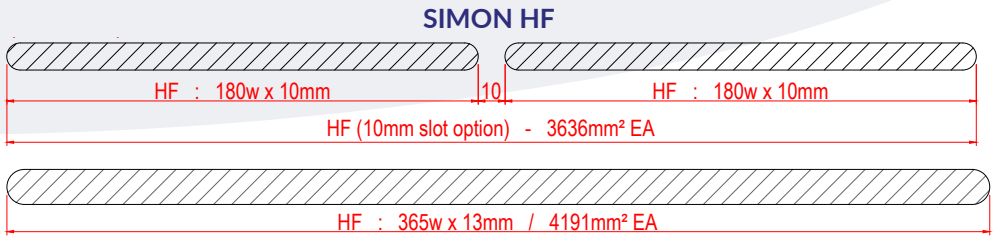

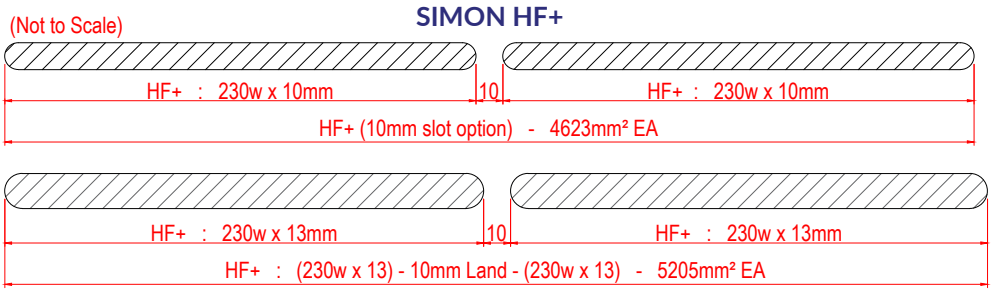

CERTIFIED ISO 9001

MADE IN GREAT BRITAIN