


Simon TTF Slimline

The Simon TTF Slimline is a through frame trickle ventilator that is a robust, yet stylish aluminium ventilator. With its built in updraught and various operating modes the TTF Slimline is suitable for all types of windows. Available in three standard sizes and six standard colours, the unit also has the added option to be coloured to meet most bespoke requirements.

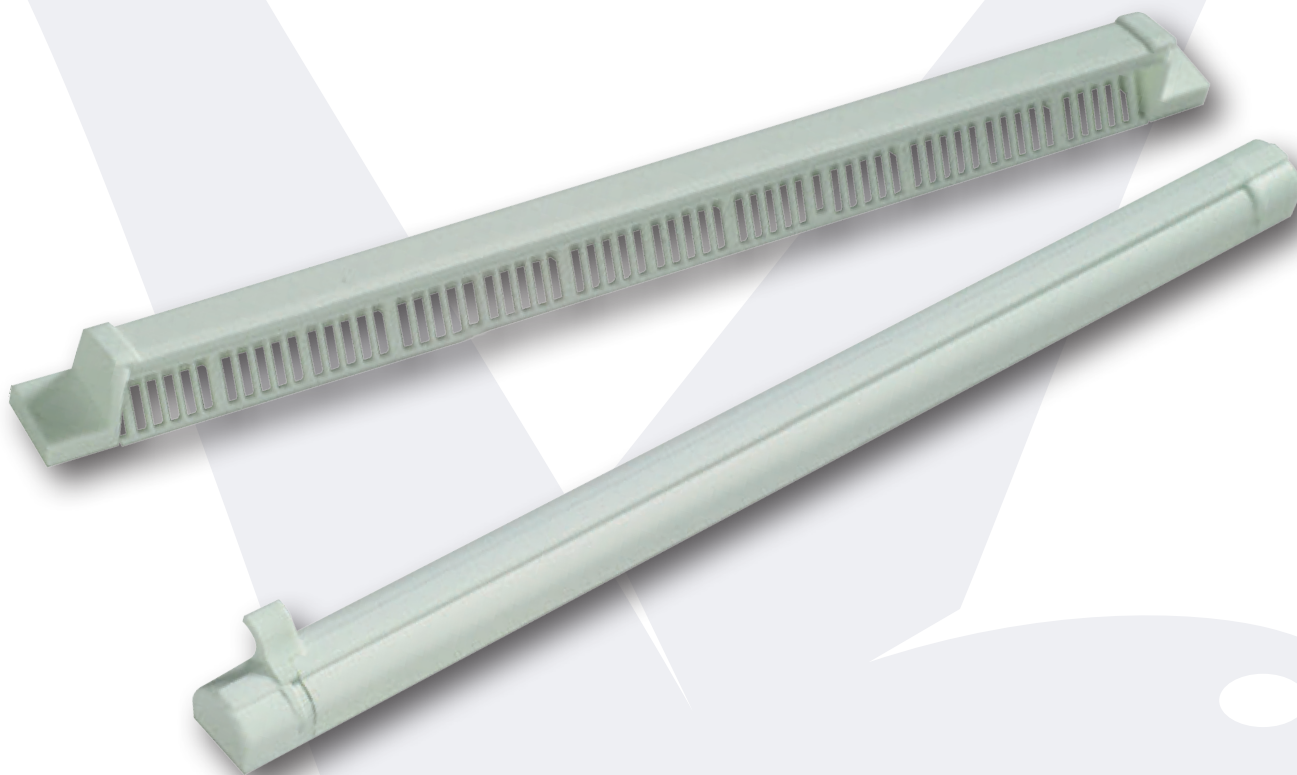

FEATURES

- » 3 airflow options available to be Approved Document F 2021 compliant
- » Easy installation & can be retro fitted
- » Semi-permanent trickle operation available
- » Marine Grade 60-80 microns as standard

OPTIONS

- » Cord & rod control operation available
- » Dual colours & RAL colours available on request
- » 10mm & 13mm slot options

AVAILABLE IN:

Standard white (RAL 9910) Mahogany Rosewood (RAL 8019) Tan (RAL 8003)
Black (RAL 9005) Grey (RAL 7016) Silver Anodised

R.W. Simon Limited

System Works, Hatchmoor Industrial Estate, Torrington, Devon EX38 7HP United Kingdom
Tel: 01805 623721 Fax: 01805 624578 Email: info@rwsimon.co.uk Web: www.rwsimon.co.uk



Simon TTF Slimline

Model Details	
TTF Slimline 300	Length – 300mm 13mm Slot Size – 235x13mm - Equivalent area – 2792mm ² 10mm Slot Size – 235x10mm - Equivalent area – 2067mm ²
TTF Slimline 400	Length – 400mm 13mm Slot Size – 365x13mm - Equivalent area – 4069mm ² 10mm Slot Size – 2 x (175x10mm) + (10mm land) - Equivalent area – 3095mm ²
TTF Slimline 600	Length – 600mm 13mm Slot Size – 2 x (275x13mm) + (10mm land) - Equivalent area – 5235mm ² 10mm Slot Size – 2 x (275x10mm) + (10mm land) - Equivalent area – 4692mm ²

All EA ratings listed are as per BS 13141-1:2019

FITTING INSTRUCTIONS

- » Rout out the frame with the correct slots size & configuration for the model to be fitted.
- » Place unit centrally over the slots.
- » Fix unit in place by using screws provided.
- » Screw holes centres are 7.5mm in from each end (15mm off the overall length)

PERFORMANCE

- » Independently tested to BS EN 13141-1:2019
- » Water tightness of 400pa
- » Independently acoustically tested in accordance with BS EN 20140-10:1992, ISO 140-10:1991.
- » Tested in accordance with BS EN 1026:2016 & BS EN 1027: 2016 Weather performance

MAINTENANCE

- » The TTF Slimline can be cleaned using a damp cloth. The external hood should be brushed lightly to remove dust from the flyscreen area.

Airflow rates quote are for when fitted in accordance with manufacturer's instructions. We recommend silicone sealing vents for best results

